

## DS-KIS202 Video Door Phone

### Key Features

#### Door Station


- Self-adaptive IR supplement
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling

#### Indoor Station

- Hands-free video intercom communication
- Supports monitoring the door station and the external analog camera
- Remote unlocking
- Convenient installation and easy operation



### Typical Application

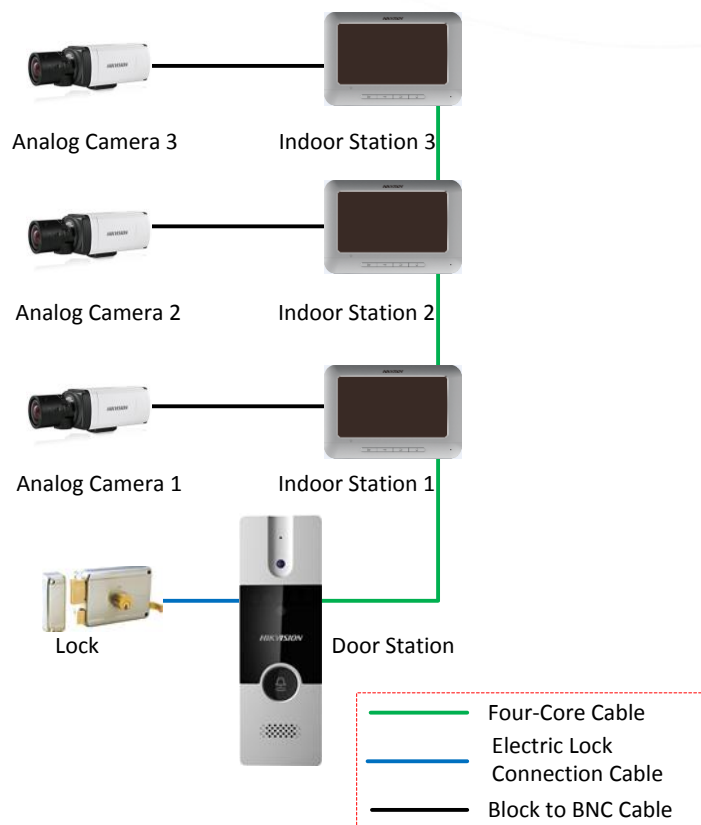


## Specifications


<b>Video Door Phone Model</b>	<b>DS-KIS202</b>
<b>Door Station (DS-KB2411-IM)</b>	
<b>Video Parameters</b>	
Camera	1/4" CMOS
Resolution	720 × 576
Video frame rate	PAL: 25 fps
<b>Audio parameters</b>	
Audio input	Built-in Omnidirectional Microphone
Audio output	Built-in Loudspeaker
Audio quality	Noise Suppression and Echo Cancellation
<b>Light Supplement</b>	
Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters
<b>Device interfaces</b>	
Four-wire interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
IO output	1 Relay Output
<b>General</b>	
Material	Aluminum Alloy
Power consumption	Max. 3W
Working temperature	-30° C to +60° C (-22° F to 140° F)
Working humidity	10% to 90%
Dimension (L x W x H)	128 mm × 42 mm × 24.8 mm (5.0" × 1.7" × 0.9")
<b>Indoor Station (DS-KH2220)</b>	
<b>Display parameters</b>	
Display screen	7-Inch Colorful TFT LCD
Display resolution	800 × 480
Operation method	Physical Button
<b>Audio parameters</b>	
Audio input	Built-in Omnidirectional Microphone
Audio output	Built-in Loudspeaker
Audio quality	Noise Suppression and Echo Cancellation
<b>Device interfaces</b>	
Four-wire interface	4 Four-Wire Interfaces
	1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding
<b>General</b>	
Power supply	12 VDC
Power consumption	≤ 5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimension (L x W x H)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")

## Appearance and Interfaces

### Door Station

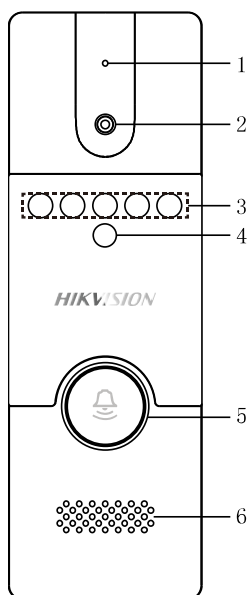

### Indoor Station

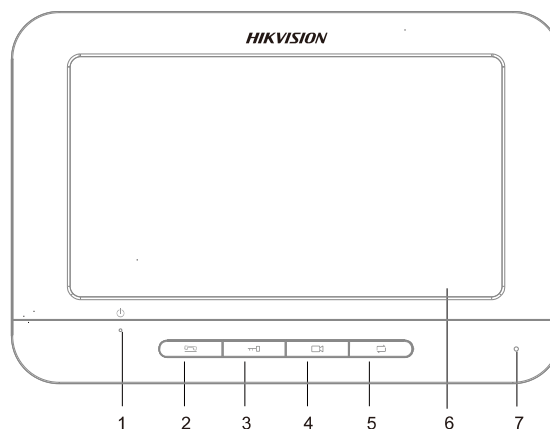

Index	Description
1	Microphone
2	Built-in Camera
3	Supplement Light
4	Photoresistor
5	Call Button
6	Loudspeaker

Index	Description
1	Power Supply Indicator
2	Call Accept/Decline Key
3	Unlock Key
4	Live View Key
5	Switch Key
6	LCD Display Screen
7	Microphone

Distributed by

[ ]

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com